


Drysdale Collection

1. UV Coating
2. Wear Layer
3. Print Film Layer
4. Fiberglass Sheet Layer
5. Core Layer
6. Balance Layer

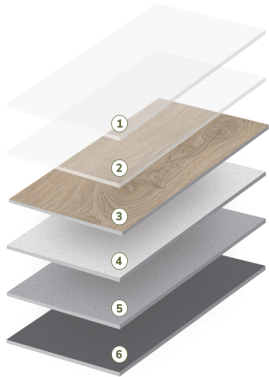

LOADING PLAN

Product	Specification				Packing Unit				
	Thickness	Wear Layer	Size		Pcs/box	Sqm/box	Sqft/box	Box/Pallet	Pallet/20D
	mm	mm	mm	inch					
LLT	5.0	0.50	178 x 1219	7" x 48"	10	2.17	23.33	50	20
LLT	3.0	0.50	178 x 1219	7" x 48"	15	3.25	35	50	20
LLT	5.0	0.50	500 x 500	19.7" x 19.7"	10	2.50	26.91	44	20
LLT	5.0	0.50	314 x 625	12.4" x 24.6"	10	1.97	21.18	54	20
LLT	5.0	0.50	229 x 1524	9" x 60"	8	2.79	30.0	60	14

TEST REPORT

Item	Standard Test Methods	Requirement	Test Results
Residual Indentation	ASTM F 1914	≤ 8%	PASS
Static Load Limit	ASTM F 970	0.005" (0.13mm)	PASS
Flexibility	ASTM F 137	Under 0.1%	PASS
Dimensional Stability	ASTM F 2199	Under 0.1%	PASS
Resistance to Chemicals	ASTM F 925	No more than slight change in surface dulling, surface attach, or staining	PASS
Resistance to Heat	ASTM F 1514	Average ΔE ≤ 8.0	PASS
Resistance to Light	ASTM F 1515	Average ΔE ≤ 8.0	PASS
Abrasion Resistance	ASTM D 6040	≤ 7.5(m/100)	PASS
Static Coefficient of Friction (SCOF)	ASTM C 1028	≥ 0.6	PASS
Non Slip	DIN 51130	≥ R9	PASS
Lead & Heavy Metal Content	SCS	Not defective	PASS
Critical Radiant Flux	ASTM E 648	≥ 4.5kw/m²	PASS
Castor Chair Suitability	NALFA 3.9/EN 425	No more than slight change in surface dulling, surface attack, or crazing	PASS
Resistance of Fungi	ASTM G 21-13	0	PASS
Impact Sound Transmission Test	ASTM E 492-09	≥ 50	PASS
Sound Transmission Class	ASTM E 90-04	≥ 50	PASS